

Warnings

Precautions for use

1. Do not look directly at the spotlight.
2. Do not block the heat sink or deform its structure.
3. Do not revolve the gimbal of T30 with external forces.
4. Do not touch the main body of the lamp cap with bare hands while working.
5. Please try to avoid using the equipment continuously for a long time in extreme environments to maintain its service life.
6. This product is a high-power device with high energy consumption and severe heat generation. Please pay attention to safety when using it.
7. Please put the equipment into safety box after use to avoid damage caused by scratching or collision by hard objects.
8. When cleaning the surface of the lamp, be sure to wipe it with a soft cleaning cloth.
9. Do not interfere with the stability and calibration of the gimbal with external forces.


Product Overview

Profile

JZ_T30 searchlight, 30W lighting power, weighs only 110g, 14 degree spotlight angel, the lighting brightness at 50 meters exceeds 24lux. It is equipped with a single-axis stabilized gimbal, supports camera linkage,DJI Pilot 2 control, adapts to DJI Mavic 3E and Mavic 3T.

Part Name

1. DJI SDK interface
To connect Mavic 3/Mavic 3T series interface
2. Quick assembly screw
To help mounting the payload
3. Lamp caps group
Provide remote lighting and search
4. Gimbal
0 to -90°pitch, support dual gimbal linkage

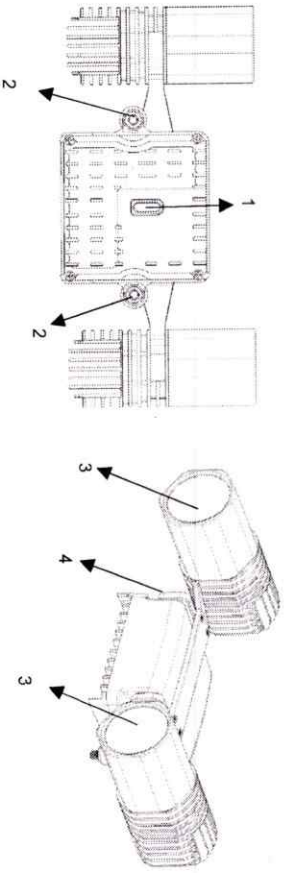


Installation and startup

Support aircraft

1. Support aircraft: Mavic 3E/Mavic 3T.
2. Please upgrade your drone to the latest firmware.
3. Please ensure that the drone is in normal condition before use.

Mounting

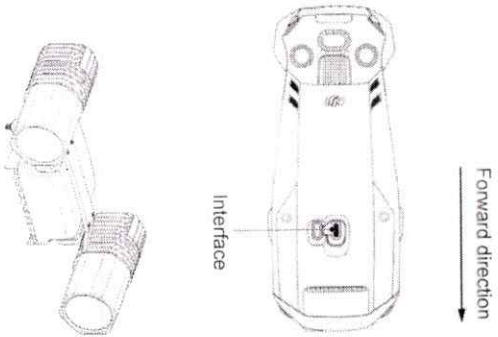


Mount to drone

1. Connect the payload SDK interface into the drone PSDK interface, and lock the load bracket screw in to the drone screw hole to ensure locking.
2. The above operations are performed when the drone is shut down. Start the remote control first, and then start the drone.

000104

Gimbal controlling

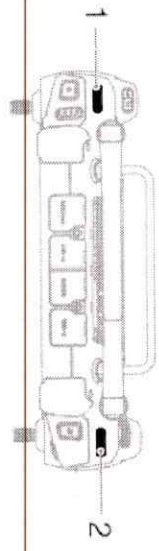

- 1. Left clickwheel
To control T30 gimbal pitching


- 2. Right clickwheel

Handwritten signature or initials in blue ink.


DJI PILOT controlling

Conned DJI Pilot APP

1. Turn on drone and remote controller.
2. After successful connection, DJI PILOT displays payload name JZ_T30.

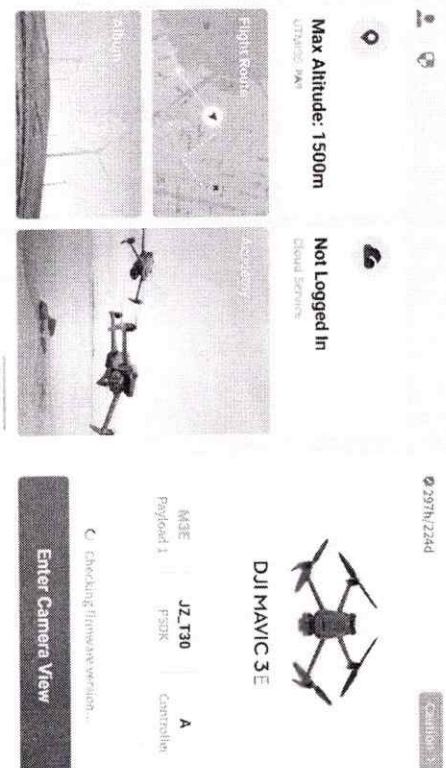

000106

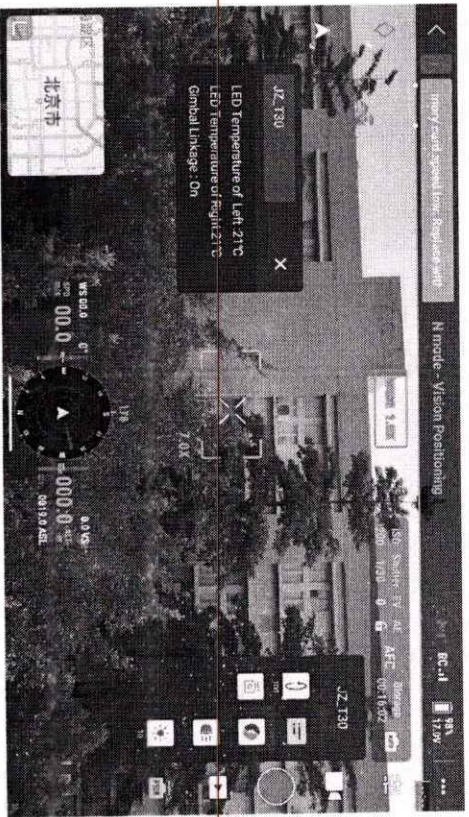

Gimbal control



LED Control



Display real time data



Dual gimbal linkage
(open by default)




LED Brightness



Alarm Lamp Control

Payload Settings

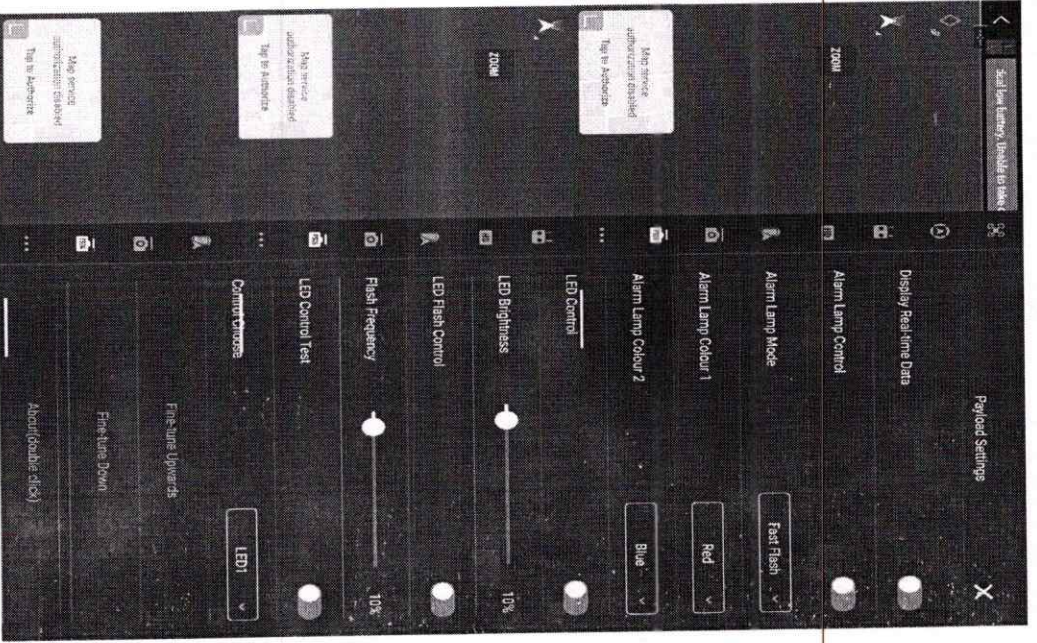


Fine-tune Upwards/Down use for lights not centered

Upgrade

1. T30 supports Mavic 3/Mavic 3T online upgrades.
2. Download DJI Assistant 2 parameter adjustment software to PC before upgrade. Connecting M3T/M3E with PC.
3. Download link: <https://www.dji.com/matrice-30/downloads>
3. Select the firmware that needs to be upgraded.




4. Wait until update complete

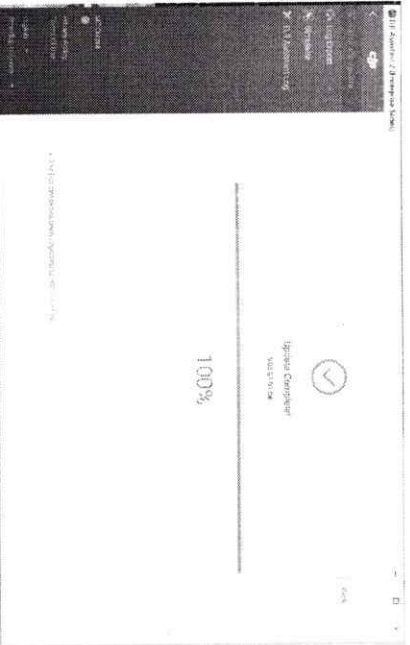

0000109

Caution

1. During installation, place gimbal in the correct direction before connecting.
2. DJI pilot apps may display abnormal occasionally, which can be solved by restarting the software.

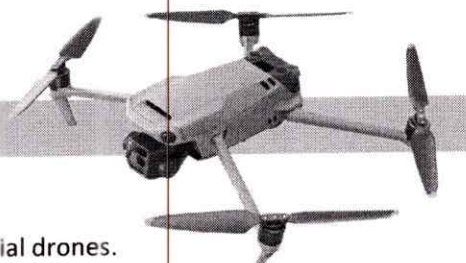

MAVIC 3 ENTERPRISE Series

Your Everyday Commercial Drone

The Mavic 3 Enterprise Series redefines industry standards for small commercial drones.

AIRCRAFT

Dimensions:	[Folded without propellers]	221×96×90 mm	(L×W×H)
	[Unfolded without propellers]	348×283×108 mm	(L×W×H)
Diagonal Distance:	380 mm	Max Take-off Weight:	1,050 g
Weight: [with propellers, without accessories]	DJI Mavic 3E:	Max Ascent Speed:	6 m/s (Normal Mode)
	DJI Mavic 3T:		8 m/s (Sport Mode)
		Max Descent Speed:	6 m/s
Max Flight Speed:	[at sea level, no wind]	- Normal Mode	15 m/s
		- Sport Mode Forward:	21 m/s
		Side:	20 m/s
		Backward:	19 m/s
Max Wind Speed Resistance:	12 m/s	Max Take-off Altitude:	6000 m Above Sea Level
Max Flight Time:	45 min	Max Hover Time:	38 min
Max Flight Distance:	32 km	Max Angular Velocity:	200°/s
Max Tilt Angle:	30° (Normal Mode)	GNSS:	GPS+Galileo+BeiDou+GLONASS
	35° (Sport Mode)		(GLONASS only when RTK module enabled)
Hovering Accuracy:	Vertical:	Horizontal:	±0.3 m (Vision System enabled)
			±0.5 m (with GNSS)
			±0.5 m (with High-Precision Positioning System)
			±0.1 m (with RTK)
Operating Temp:	-10° to 40° C	Internal Storage:	N/A
Motor Model:	2008	Propeller Model:	9453F Propellers for Enterprise
Beacon:	Built-in		

WIDE CAMERA

	DJI Mavic 3E	DJI Mavic 3T
Sensor:	4/3 CMOS, Effective pixels: 20 MP	1/2-inch CMOS, Effective pixels: 48 MP
Lens:	FOV: 84°	84°
	Format Equivalent: 24 mm	24 mm
	Aperture: f/2.8-f/11	f/2.8
	Focus: 1 m to ∞	1 m to ∞
ISO Range:	100-6400	100-25600
Shutter Speed:	Electronic Shutter	8-1/8000 s
	Mechanical Shutter	8-1/2000 s
Max Image Size:	5280×3956	8000×6000

OPTRON (Pty) Ltd

Tel: +27 12 683 4500
Email: info@optron.com
Website: www.optron.com

Lakefield Office Park (Building C)
272 West Avenue, Centurion 0157
SOUTH AFRICA

OPTRON

000111

	DJI Mavic 3E	DJI Mavic 3T
Still Photography Modes		
Single:	20 MP	12 MP/48 MP
Timed:	20 MP	12 MP/48 MP
JPEG:	0.7/1/2/3/5/7/10/15/20/30/60 s	2/3/5/7/10/15/20/30/60 s
JPEG+RAW:	3/5/7/10/15/20/30/60 s	
Smart Low-light Shooting:	20 MP	12 MP
Panorama:	20 MP (raw image)	12 MP (raw); 100 MP (stitched)
Bitrate:		
	4K: 130 Mbps FHD: 70 Mbps	4K: 85 Mbps FHD: 30 Mbps
Photo Format:		
	JPEG/DNG (RAW)	DJI Mavic 3T: JPEG
Video Resolution:		
	H.264 4K: 3840×2160@30fps FHD: 1920×1080@30fps	
Supported File Formats:		
	exFAT	
Video Format:		
	MP4 (MPEG-4 AVC/H.264)	

TELE CAMERA

Sensor:	1/2-inch CMOS, Effective pixels: 12 MP	Lens	FOV: 15° Format Equivalent: 162 mm Aperture: f/4.4 Focus: 3 m to ∞
Shutter Speed:	Electronic Shutter: 8-1/8000 s		
Max Image Size:	4000×3000		
Video Resolution:	H.264 4K: 3840×2160@30fps FHD: 1920×1080@30fps	Photo Format:	JPEG
		Video Format:	MP4 (MPEG-4 AVC/H.264)
		Digital Zoom:	8x (56x hybrid zoom)

	DJI Mavic 3E	DJI Mavic 3T
ISO Range:	100-6400	100-25600
Still Photography Modes		
Single:	12 MP	12 MP
Timed:	12 MP	12 MP
JPEG:	0.7/1/2/3/5/7/10/15/20/30/60 s	2/3/5/7/10/15/20/30/60 s
Smart Low-light Shooting:	12 MP	12 MP
Bitrate:		
	4K: 130 Mbps FHD: 70 Mbps	4K: 85 Mbps FHD: 30 Mbps

THERMAL CAMERA

Thermal Imager:	Uncooled VOx Microbolometer	Lens	DFOV: 61° Format Equivalent: 40 mm Aperture: f/1.0 Focus: 5 m to ∞
Pixel Pitch:	12 μm		
Frame Rate:	30 Hz		
Sensitivity:	≤50 mk@F1.1	Photo Format:	JPEG (8-bit) R-JPEG (16-bit)
Temp Measurement Method:	Spot Meter, Area Measurement		
Temp Measurement Range:	-20° to 150° C (High Gain Mode) 0° to 500° C (Low Gain Mode)		
Palette:	White Hot/Black Hot/Tint/Iron Red/Hot Iron/Arctic/Medical/Fulgurite/Rainbow 1/Rainbow 2		
Still Photography Modes (DJI Mavic 3T):		Video Resolution:	640×512@30fps
Single:	640×512	Bitrate:	6 Mbps
Timed:	640×512	Video Format:	MP4 (MPEG-4 AVC/H.264)

OPTRON (Pty) Ltd

Tel: +27 12 683 4500
Email: info@optron.com
Website: www.optron.com

Lakefield Office Park (Building C)
272 West Avenue, Centurion 0157
SOUTH AFRICA

OPTRON

JPEG: 2/3/5/7/10/15/20/30/60 s

Digital Zoom: 28x

Infrared Wavelength: 8-14 μm Infrared Temp Measurement Accuracy: $\pm 2^\circ\text{C}$ or $\pm 2\%$ **GIMBAL**

Stabilization: 3-axis (tilt, roll, pan)

Controllable Range:

Tilt:

 -90° to 35°

Pan:

Not controllable

Max Control Speed (tilt): $100^\circ/\text{s}$

Angular Vibration Range:

 $\pm 0.007^\circ$

DJI Mavic 3E

DJI Mavic 3T

Mechanical Range: Tilt: -135° to 100°
 Roll: -45° to 45°
 Pan: -27° to 27°

-135° to 45°
 -45° to 45°
 -27° to 27°

SENSING

Type: Omnidirectional binocular vision system, supplemented with an infrared sensor at the bottom of the aircraft.

Forward

Measurement Range: 0.5-20 m
 Detection Range: 0.5-200 m
 Effective Sensing Speed: Flight Speed $\leq 15\text{ m/s}$
 FOV: Horizontal 90° , Vertical 103°

Backward

Measurement Range: 0.5-16 m
 Effective Sensing Speed: Flight Speed $\leq 12\text{ m/s}$
 FOV: Horizontal 90° , Vertical 103°

Lateral

Measurement Range: 0.5-25 m
 Effective Sensing Speed: Flight Speed $\leq 15\text{ m/s}$
 FOV: Horizontal 90° , Vertical 85°

Upward

Measurement Range: 0.2-10 m
 Effective Sensing Speed: Flight Speed $\leq 6\text{ m/s}$
 FOV: Front/Back 100° , Left/Right 90°

Downward

Measurement Range: 0.3-18 m
 Effective Sensing Speed: Flight Speed $\leq 6\text{ m/s}$
 FOV: Front/Back 130° , Left/Right 160°

Operating Environment:

Forward, Backward, Lateral, and Upward: Surface with a clear pattern and adequate lighting (lux > 15)
 Downward: Diffuse reflective surface with diffuse reflectivity $> 20\%$ (e.g. walls, trees, people) and adequate lighting (lux > 15)

VIDEO TRANSMISSION

Video Transmission System: DJI O3 Enterprise Transmission
 Live View Quality: Remote Controller: 1080p/30fps

Operating Frequency: 2.400-2.4835 GHz
 5.725-5.850 GHz

Max Transmission Distance:

Unobstructed / free of interference FCC: 15 km | CE: 8 km | SRRC: 8 km | MIC: 8 km
 Obstructed Strong Interference: 1.5-3 km (FCC/CE/SRRC/MIC)
 Medium Interference: 3-9 km (FCC), 3-6 km (CE/SRRC/MIC)
 Low Interference: 9-15 km (FCC), 6-8 km (CE/SRRC/MIC)

Max Download Speed: 15 MB/s (with DJI RC Pro Enterprise)
 Antenna: 4 Antennas, 2T4R

Latency:

Approx. 200 ms

Transmission Power: 2.4 GHz: $< 33\text{ dBm}$ (FCC), $< 20\text{ dBm}$ (CE/SRRC/MIC)
 (EIRP) 5.8 GHz: $< 33\text{ dBm}$ (FCC), $< 30\text{ dBm}$ (SRRC), $< 14\text{ dBm}$ (CE)

OPTRON (Pty) Ltd

Tel: +27 12 683 4500
 Email: info@optron.com
 Website: www.optron.com

Lakefield Office Park (Building C)
 272 West Avenue, Centurion 0157
 SOUTH AFRICA

OPTRON

DJI RC PRO ENTERPRISE

Sensor:	1/2" CMOS, Effective pixels: 48M	Lens	Focal length: 21-75 mm (equivalent: 113-405 mm) Aperture: f/2.8-f/4.2 Focus: 5 m to ∞
Video Transmission System:	DJI O3 Enterprise Transmission		
Max Transmission Distance (unobstructed):	FCC: 15 km CE/SRRC/MIC: 8 km		
Video Transmission Operating Frequency:	2.400-2.4835 GHz 5.725-5.850 GHz		
Video Transmission Transmitter Power (EIRP):	2.4 GHz: <33 dBm (FCC), <20 dBm (CE/SRRC/MIC) 5.8 GHz: <33 dBm (FCC), <14 dBm (CE), <23 dBm (SRRC)		
Antenna:	4 Antennas, 2T4R	Wi-Fi Operating Frequency:	2.400-2.4835 GHz
Wi-Fi Protocol:	802.11 a/b/g/n/ac/ax Support 2x2 MIMO Wi-Fi		5.150-5.250 GHz 5.725-5.850 GHz
Wi-Fi Transmitter Power (EIRP):	2.4 GHz: <26 dBm (FCC), <20 dBm (CE/SRRC/MIC) 5.1 GHz: <26 dBm (FCC), <23 dBm (CE/SRRC/MIC) 5.8 GHz: <26 dBm (FCC/SRRC), <14 dBm (CE)		
Bluetooth Protocol:	Bluetooth 5.1	Bluetooth Operating Frequency:	2.400-2.4835 GHz
Bluetooth Transmitter Power (EIRP):	< 10 dBm	Screen Resolution:	1920x1080
Screen Size:	5.5 inches	Screen:	60 fps
Brightness:	1,000 nits	Touchscreen Control:	10-point multi-touch
Battery:	Li-ion (5000 mAh @ 7.2 V)	Rated Power:	12 W
Charging Type:	Recommended to be charged with included 100W DJI USB-C Power Adapter or 12V / 15 V USB charger		
Storage Capacity:	Internal Storage (ROM): 64 GB Supports a microSD card for expanded capacity.		
Charging Time:			
Approx. 1 hour 30 minutes	100W DJI USB-C Power Adapter charging the remote controller or USB charger at 15 V		
Approx. 2 hours	with a USB charger at 12 V		
Approx. 2 hours 50 minutes	100W DJI USB-C Power Adapter charging aircraft and remote controller simultaneously		
Operating Time:	Approx. 3 hours	Video Output Port :	Mini-HDMI port
Operating Temp Range:	-10° to 40° C	Storage Temperature:	-30° to 60° C (within one month)
Charging Temperature:	5° to 40° C		-30° to 45° C (one to three months)
Supported DJI Aircraft:	DJI Mavic 3E 3T		-30° to 35° C (three to six months)
GNSS:	GPS+Galileo+GLONASS		
Dimensions:	Antennas folded and controller sticks unmounted:	183.27x137.41x47.6 mm (LxWxH)	
	Antennas unfolded and controller sticks mounted:	183.27x203.35x59.84 mm (LxWxH)	
Weight:	Approx. 680 g	Model:	RM510B

OPTRON (Pty) Ltd

Tel: +27 12 683 4500
Email: info@optron.com
Website: www.optron.com

Lakefield Office Park (Building C)
272 West Avenue, Centurion 0157
SOUTH AFRICA

OPTRON

STORAGE

Supported Memory Cards: Aircraft: U3/Class10/V30 or above is required. A list of recommended microSD cards can be found below.

Recommended microSD Cards**Remote Controller:**

SanDisk Extreme PRO 64GB V30 A2 microSDXC
 SanDisk High Endurance 64GB V30 microSDXC
 SanDisk Extreme 128GB V30 A2 microSDXC
 SanDisk Extreme 256GB V30 A2 microSDXC
 SanDisk Extreme 512GB V30 A2 microSDXC
 Lexar 667x 64GB V30 A2 microSDXC
 Lexar High-Endurance 64GB V30 microSDXC
 Lexar High-Endurance 128GB V30 microSDXC
 Lexar 667x 256GB V30 A2 microSDXC
 Lexar 512GB V30 A2 microSDXC
 Samsung EVO Plus 64GB V30 microSDXC
 Samsung EVO Plus 128GB V30 microSDXC
 Samsung EVO Plus 256GB V30 microSDXC
 Samsung EVO Plus 512GB V30 microSDXC
 Kingston Canvas Go! Plus 128GB V30 A2 microSDXC
 Kingston Canvas React Plus 128GB V90 A1 microSDXC

Aircraft:

SanDisk Extreme 32GB V30 A1 microSDHC
 SanDisk Extreme PRO 32GB V30 A1 microSDHC
 SanDisk Extreme 512GB V30 A2 microSDXC
 Lexar 1066x 64GB V30 A2 microSDXC
 Kingston Canvas Go! Plus 64GB V30 A2 microSDXC
 Kingston Canvas React Plus 64GB V90 A1 microSDXC
 Kingston Canvas Go! Plus 128GB V30 A2 microSDXC
 Kingston Canvas React Plus 128GB V90 A1 microSDXC
 Kingston Canvas React Plus 256GB V90 A2 microSDXC
 Samsung PRO Plus 256GB V30 A2 microSDXC

BATTERY

Capacity:	5000 mAh	Standard Voltage:	15.4 V
Max Charging Voltage:	17.6 V	Type:	LiPo 4S
Chemical System:	LiCoO2	Energy:	77 Wh
Weight:	335.5 g	Charging Temp:	5° to 40° C

CHARGER

Input:	100-240 V (AC Power), 50-60 Hz, 2.5 A	Output Power:	100 W
Output:	Max. 100 W (total) When both ports are used, the maximum output power of each interface is 82 W, and the charger will dynamically allocate the output power of the two ports according to the load power.		

CHARGING HUB

Input:	USB-C: 5-20 V, 5.0 A	Output:	Battery Port: 12-17.6 V, 8.0 A
Rated Power:	100 W	Charging Type:	Three batteries charged in sequence
Charging Temperature Range:	5° to 40° C		

RTK MODULE

Dimensions:	50.2×40.2×66.2 mm (L×W×H)	Weight:	24±2 g
Interface:	USB-C	Power:	Approx. 1.2 W
RTK Positioning Accuracy:	(RTK Fix) Horizontal: 1 cm + 1 ppm; Vertical: 1.5 cm + 1 ppm		

SPEAKER

Dimensions:	114.1×82.0×54.7 mm (L×W×H)	Weight:	85±2 g
Interface:	USB-C	Rated Power:	3 W
Max Volume:	110 dB @ 1 m	Effective Broadcast Distance:	100 m @ 70 dB
Bit Rate:	16 Kbps/32 Kbps	Operating Temp Range:	-10° to 40° C (14° to 104° F)

OPTRON (Pty) Ltd

Tel: +27 12 683 4500
Email: info@optron.com
Website: www.optron.com

Lakefield Office Park (Building C)
 272 West Avenue, Centurion 0157
 SOUTH AFRICA

OPTRON

As baterias possuem capacidade de 5000mAh, garantindo até 45 minutos de voo total e 38 minutos em hover, com LEDs indicadores em incrementos de 25%, atendendo às condições operacionais exigidas.

Item 22 – Fonte 100W com cabos NBR14136, USB-A→C e USB-C→C

A fonte de alimentação incluída é de 100W (DJI Original) e acompanha cabos USB-A para USB-C e USB-C para USB-C. O plugue segue o padrão NBR14136, atendendo às normas brasileiras.

Item 23 – Ferramentas para manutenção e fixação

O kit acompanha ferramenta de substituição e fixação das hélices, conforme fornecido no pacote DJI Mavic 3T Enterprise Combo.

Item 24 – Garantia mínima de 12 meses

O equipamento possui garantia de 12 meses (1 ano) contra defeitos de fabricação, conforme política de garantia da DJI Enterprise.

Item 25 – Bateria adicional com mesmas especificações

O kit acompanha três baterias inteligentes originais, todas com as mesmas especificações técnicas e capacidade nominal de 5000mAh.

Item 26 – Hélices extras (4 un.) e ferramentas de substituição

O kit Mavic 3T Enterprise Combo inclui seis hélices (três pares), atendendo à exigência de quatro unidades sobressalentes, além das ferramentas para fixação e substituição.

Conclusão

Com base nas informações apresentadas, o DJI Mavic 3T Enterprise Thermal atende integralmente aos requisitos técnicos e funcionais do edital, apresentando desempenho comprovado, confiabilidade e conformidade regulatória. O modelo ofertado é amplamente utilizado em operações de segurança pública, defesa civil e inspeções técnicas, garantindo precisão e eficiência nas missões.

Atenciosamente,

JOSÉ CIRILO ALVES DO VALE (DIRETOR)

CPF: 026.473.271-57 RG: 254.223-7

GOIANÉSIA/GO, 09 DE OUTUBRO DE 2025

QUANTICA DISTRIBUIDORA E
SOLUCOES EM TECNOLOGIA
L:10939454000186

Assinado de forma digital por QUANTICA
DISTRIBUIDORA E SOLUCOES EM
TECNOLOGIA L:10939454000186
Dados: 2025.10.09 15:05:45 -03'00'

(Handwritten signatures)



000116

Sistema de Cadastramento Unificado de Fornecedores - SICAF

Declaração

Declaramos para os fins exigidos na legislação, conforme documentação registrada no SICAF, que a situação do fornecedor no momento é a seguinte:

Dados do Fornecedor

CNPJ: 59.377.751/0001-74
Razão Social: DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA
Nome Fantasia: DRONE AIR
Situação do Fornecedor: Credenciado Data de Vencimento do Cadastro: 23/02/2026
Natureza Jurídica: SOCIEDADE EMPRESÁRIA LIMITADA
MEI: Não
Porte da Empresa: Empresa de Pequeno

Ocorrências e Impedimentos

Ocorrência: Nada Consta
Impedimento de Licitar: Nada Consta

Níveis cadastrados:

Automática: a certidão foi obtida através de integração direta com o sistema emissor. Manual: a certidão foi inserida manualmente pelo fornecedor.

I - Credenciamento

II - Habilitação Jurídica

III - Regularidade Fiscal e Trabalhista Federal

Receita Federal e PGFN	Validade:	08/02/2026	Automática
FGTS	Validade:	09/09/2025	Automática
Trabalhista (http://www.tst.jus.br/certidao)	Validade:	14/02/2026	Automática

IV - Regularidade Fiscal Estadual/Distrital e Municipal

Receita Estadual/Distrital	Validade:	12/02/2026
Receita Municipal	Validade:	04/02/2026

VI - Qualificação Econômico-Financeira

Validade:	30/06/2026
-----------	------------

Esta declaração é uma simples consulta e não tem efeito legal

Emitido em: 18/08/2025 14:49

CPF: 033.XXX.XXX-25 Nome: JULIUS CESAR DE CARVALHO GUIMARAES FILHO

Ass: _____

1 de 1



000117

TRIBUNAL DE CONTAS DA UNIÃO

Consulta Consolidada de Pessoa Jurídica

Este relatório tem por objetivo apresentar os resultados consolidados de consultas eletrônicas realizadas diretamente nos bancos de dados dos respectivos cadastros. A responsabilidade pela veracidade do resultado da consulta é do Órgão gestor de cada cadastro consultado. A informação relativa à razão social da Pessoa Jurídica é extraída do Cadastro Nacional da Pessoa Jurídica, mantido pela Receita Federal do Brasil.

Consulta realizada em: 22/05/2025 16:55:07

Informações da Pessoa Jurídica:

Razão Social: **DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA**
CNPJ: **59.377.751/0001-74**

Resultados da Consulta Eletrônica:

Órgão Gestor: **TCU**
Cadastro: **Licitantes Inidôneos**
Resultado da consulta: **Nada Consta**

Para acessar a certidão original no portal do órgão gestor, clique [AQUI](#).

Órgão Gestor: **CNJ**
Cadastro: **CNIA - Cadastro Nacional de Condenações Cíveis por Ato de Improbidade Administrativa e Inelegibilidade**
Resultado da consulta: **Nada Consta**

Para acessar a certidão original no portal do órgão gestor, clique [AQUI](#).

Órgão Gestor: **Portal da Transparência**
Cadastro: **Cadastro Nacional de Empresas Inidôneas e Suspensas**
Resultado da consulta: **Nada Consta**

Para acessar a certidão original no portal do órgão gestor, clique [AQUI](#).

Órgão Gestor: **Portal da Transparência**
Cadastro: **CNEP - Cadastro Nacional de Empresas Punidas**
Resultado da consulta: **Nada Consta**

Para acessar a certidão original no portal do órgão gestor, clique [AQUI](#).

Obs: A consulta consolidada de pessoa jurídica visa atender aos princípios de simplificação e racionalização de serviços públicos digitais. Fundamento legal: Lei nº 12.965, de 23 de abril de 2014, Lei nº 13.460, de 26 de junho de 2017, Lei nº 13.726, de 8 de outubro de 2018, Decreto nº 8.638 de 15, de janeiro de 2016.

CERTIDÃO DE INTEIRO TEOR

DOCUMENTO EMITIDO PELA INTERNET

DADOS DA EMPRESA			
NOME EMPRESARIAL DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA		TIPO JURÍDICO LIMITADA UNIPessoal (E.P.P.)	
NIRE 35266632245	CNPJ 59.377.751/0001-74	NÚMERO DO ARQUIVAMENTO 35266632245	DATA DO ARQUIVAMENTO 10/02/2025

DADOS DA CERTIDÃO		
DATA DE EXPEDIÇÃO 11/02/2025	HORA DE EXPEDIÇÃO 16:49:48	CÓDIGO DE CONTROLE 257019225
A AUTENTICIDADE DO PRESENTE DOCUMENTO, BEM COMO O ARQUIVO NA FORMA ELETRÔNICA PODEM SER VERIFICADOS NO ENDEREÇO WWW.JUCESPONLINE.SP.GOV.BR		

ESTA CÓPIA FOI AUTENTICADA DIGITALMENTE E ASSINADA EM 11/02/2025 PELO SECRETÁRIO GERAL DA JUCESP – ALOIZIO EPIFANIO SOARES JUNIOR, CONFORME ART. 1º DA MP2200-2 DE 24/08/2001, QUE INSTITUI A INFRAESTRUTURA DE CHAVES PÚBLICAS BRASILEIRAS – ICP BRASIL, EM VIGOR CONSOANTE E.C Nº32 DE 11/09/2001 M- ART.2º.

ART 1º. FICA INSTITUÍDA A INFRAESTRUTURA DE CHAVES PÚBLICAS BRASILEIRA – ICP BRASIL, PARA GARANTIR AUTENTICIDADE, INTEGRIDADE E VALIDADE JURÍDICA DE DOCUMENTOS EM FORMA ELETRÔNICA, DAS APLICAÇÕES DE SUPORTE E DAS APLICAÇÕES HABILITADAS QUE UTILIZEM CERTIFICADOS DIGITAIS, BEM COMO A REALIZAÇÃO DE TRANSAÇÕES ELETRÔNICAS SEGURAS.

119



Requerimento Capa

SEQ. DOC
01
01

Protocolo Redesim

SPP2530185365



DADOS CADASTRAIS

ATO(S) Constituição Normal; Enquadramento de Empresa Pequeno Porte - EPP		
NOME EMPRESARIAL DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA		PORTE EPP
LOGRADOURO RUA DA MOOCA		NÚMERO 2672
COMPLEMENTO ANEXO 2674 - 2676	BAIRRO/DISTRITO MOOCA	CEP 03165000
MUNICÍPIO SÃO PAULO		UF SP
E-MAIL COMERCIAL@DRONEAIR.STORE.COM		TELEFONE
NÚMERO EXIGÊNCIA (S) SEM EXIGÊNCIA ANTERIOR	CNPJ - SEDE	NIRE - SEDE
IDENTIFICAÇÃO DO SIGNATÁRIO/ASSINANTE DO REQUERIMENTO CAPA NOME: JULIUS CESAR DE CARVALHO GUIMARAES FILHO - Sócio-Administrador DATA ASSINATURA: ASSINATURA:		VALORES RECOLHIDOS DARE R\$ 211,01 DARF Isento

DECLARO, SOB AS PENAS DA LEI, QUE AS INFORMAÇÕES CONSTANTES DO REQUERIMENTO/PROCESSO SÃO EXPRESSÃO DA VERDADE.

PARA USO EXCLUSIVO DA JUNTA COMERCIAL DO ESTADO DE SÃO PAULO (INCLUSIVE VERSO)

CARIMBO PROTOCOLO	OBSERVAÇÕES:
-------------------	--------------

DOCUMENTOS NÃO RETIRADOS EM ATÉ 90 DIAS DA DISPONIBILIDADE SERÃO DESCARTADOS - ART. 57, §5º, DECRETO 1.800/96

10/02/2025

Página 1 de 1



Certifico o registro de constituição sob o NIRE nº 35266632245 em 10/02/2025 da empresa DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA, protocolado sob o nº SPP2530185365. Autenticação: validar a autenticidade do registro em <http://www.jucesp.sp.gov.br/> com o número do mesmo. ALOIZIO EPIFANIO SOARES JUNIOR - Secretário Geral. Esta cópia foi autenticada digitalmente e assinada em 11/02/2025 por ALOIZIO EPIFANIO SOARES JUNIOR - Secretário Geral. Autenticação: 257019225. A JUCESP garante a autenticidade do registro e da Certidão de Inteiro Teor quando visualizado diretamente no portal www.jucesp-online.sp.gov.br.

CONTRATO SOCIAL DE SOCIEDADE LIMITADA
DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA

Sócio-Administrador JULIUS CESAR DE CARVALHO GUIMARAES FILHO, nacionalidade: brasileira, solteiro (a), natural da cidade de Recife/PE, nascido(a) em: 07/03/1981, n° do documento de identidade: CNH 00551257521 Órgão Emissor: DETRAN/PB, EMPRESARIO, n° do CPF: 03327729425, RESIDENTE E DOMICILIADO(A) no(a) RUA PHILADELPHO PINTO DE CARVALHO, 167 - Bairro: AEROCUBE, João Pessoa - PB CEP 58036105.

Resolvem, em comum acordo, constituir uma sociedade limitada, mediante as condições e cláusulas seguintes:

DO NOME EMPRESARIAL

Cláusula Primeira - A sociedade adotará o seguinte nome empresarial: **DRONE AIR COMERCIO E SERVICOS TECNOLOGICOS LTDA.**

DA SEDE

Cláusula Segunda - A sociedade terá sua sede no seguinte endereço: RUA DA MOOCA, 2672 ANEXO 2674 - 2676 - Bairro: MOOCA, São Paulo - SP CEP 03165000.

DO OBJETO SOCIAL

Cláusula Terceira - A sociedade terá por objeto o exercício das seguintes atividades econômicas: ATIVIDADES DE CONSULTORIA EM GESTAO EMPRESARIAL EXCETO CONSULTORIA TECNICA ESPECIFICA ATIVIDADES DE PRODUCAO CINEMATOGRAFICA DE VIDEOS E DE PROGRAMAS DE TELEVISAO NAO ESPECIFICADAS ANTERIORMENTE ATIVIDADES DE PRODUCAO DE FOTOGRAFIAS EXCETO AEREA E SUBMARINA COMERCIO ATACADISTA DE EQUIPAMENTOS DE INFORMATICA COMERCIO ATACADISTA DE OUTROS EQUIPAMENTOS E ARTIGOS DE USO PESSOAL E DOMESTICO NAO ESPECIFICADOS ANTERIORMENTE COMERCIO VAREJISTA DE ARTIGOS FOTOGRAFICOS E PARA FILMAGEM COMERCIO VAREJISTA DE BRINQUEDOS E ARTIGOS RECREATIVOS COMERCIO VAREJISTA DE OUTROS PRODUTOS NAO ESPECIFICADOS ANTERIORMENTE COMERCIO VAREJISTA ESPECIALIZADO DE ELETRODOMESTICOS E EQUIPAMENTOS DE AUDIO E VIDEO COMERCIO VAREJISTA ESPECIALIZADO DE EQUIPAMENTOS DE TELEFONIA E COMUNICACAO COMERCIO VAREJISTA ESPECIALIZADO DE EQUIPAMENTOS E SUPRIMENTOS DE INFORMATICA COMERCIO VAREJISTA ESPECIALIZADO DE PECAS E ACESSORIOS PARA APARELHOS ELETROELETRONICOS PARA USO DOMESTICO EXCETO INFORMATICA E COMUNICACAO CURSOS DE PILOTAGEM FILMAGEM DE FESTAS E EVENTOS IMPRESSAO DE MATERIAL PARA USO PUBLICITARIO MANUTENCAO E REPARACAO DE EQUIPAMENTOS E INSTRUMENTOS OPTICOS OUTRAS ATIVIDADES DE ENSINO NAO ESPECIFICADAS ANTERIORMENTE PREPARACAO DE DOCUMENTOS E SERVICOS ESPECIALIZADOS DE APOIO ADMINISTRATIVO NAO ESPECIFICADOS ANTERIORMENTE REPARACAO E MANUTENCAO DE EQUIPAMENTOS ELETROELETRONICOS DE USO PESSOAL E DOMESTICO REPARACAO E MANUTENCAO DE OUTROS OBJETOS E EQUIPAMENTOS PESSOAIS E DOMESTICOS NAO ESPECIFICADOS